




Construction Specification

Conductor	CCA, 3.50 ± 0.02 mm
Insulation	PE foam, Ø10.10 ± 0.10 mm
Binder/Braid Shield	AP+TC, Ø10.90 ± 0.10 mm
Jacket	Black, LSZH, Ø13.00 ± 0.15 mm

Mechanical Characteristics

Minimum bending radius	130 mm
Operating temperature	-40 ~ 70°C
Cutoff frequency	12 Ghz
Shielding effect	≥ 90 %

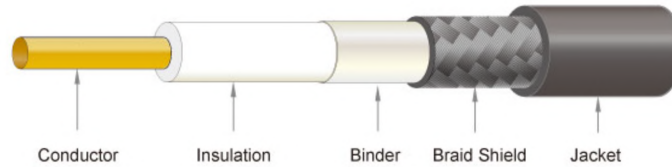

Electrical Characteristics

Capacitance	84 ± 2 pF/m
Impedance	50 Ω
Velocity	81 %
Operating frequency	10 ~ 6000 MHz
Time delay	3.65 ns/m
Max. operating Voltage	2000 Vrms/min

Attenuation

400 MHz	0.070 dB/m
900 MHz	0.110 dB/m
1800 MHz	0.170 dB/m
2500 MHz	0.198 dB/m

 Free Support

 3-year warranty & service

 3-7 business day delivery

 30-day return policy

Need Help?

support@rangeful.com
+371 25 444 666